


## 8E067

Electric actuator with 2 way stainless steel ball valve direct mount (Vapres 700076).

OPERATING CONDITIONS: fluid H<sub>2</sub>O - T 68°F



### Technical specifications

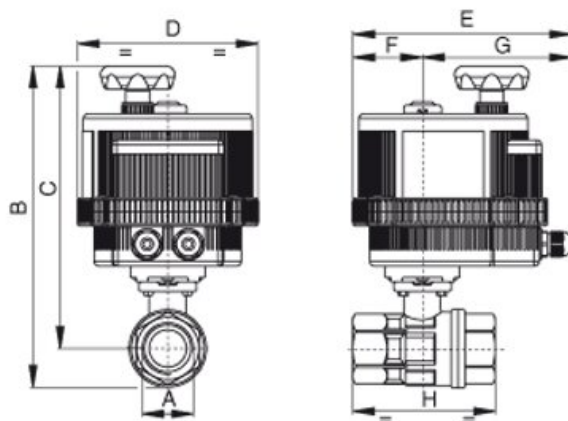

| SIZE | PSI  | B     | C     | D    | E    | F    | G    | H    | ACT.   |
|------|------|-------|-------|------|------|------|------|------|--------|
| -    | 1000 | 8.33  | 7.32  | 4.84 | 6.41 | 1.67 | 4.74 | 3.54 | VB 015 |
| -    | 1000 | 11.40 | 9.88  | 6.18 | 7.50 | 2.38 | 5.12 | 4.41 | VB 030 |
| -    | 1000 | 8.73  | 7.46  | 4.84 | 6.41 | 1.67 | 4.74 | 3.94 | VB 015 |
| -    | 1000 | 7.53  | 6.85  | 4.84 | 6.41 | 1.67 | 4.74 | 2.64 | VB 015 |
| -    | 1000 | 12.15 | 10.24 | 6.18 | 7.50 | 2.38 | 5.12 | 5.32 | VB 030 |
| -    | 1000 | 7.75  | 6.93  | 4.84 | 6.41 | 1.67 | 4.74 | 3.07 | VB 015 |

