


## M8E064

Metal electric actuator with 2 way brass ball valve direct mount (RB 250N).

OPERATING CONDITIONS: fluid H<sub>2</sub>O - T 68°F



### Technical specifications

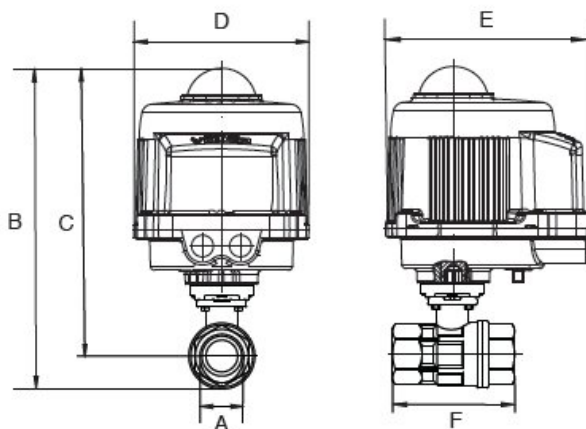

| SIZE | PSI | A    | B     | C     | D     | E     | F    | ACT.   |
|------|-----|------|-------|-------|-------|-------|------|--------|
| -    | 600 | 1.00 | 10.59 | 9.65  | 6.34  | 7.36  | 3.35 | VB 030 |
| -    | 600 | 1.50 | 11.79 | 10.47 | 6.34  | 7.36  | 1.13 | VB 030 |
| -    | 600 | 1.25 | 10.91 | 9.9   | 6.34  | 7.36  | 3.66 | VB 030 |
| -    | 600 | .500 | 9.77  | 9.09  | 6.34  | 7.36  | 2.64 | VB 030 |
| -    | 600 | .250 | 9.77  | 9.09  | 6.34  | 7.36  | 2.64 | VB 030 |
| -    | 600 | 2.00 | 12.51 | 11.00 | 6.34  | 7.36  | 4.80 | VB 030 |
| -    | 600 | 2.50 | 14.39 | 12.56 | 6.93  | 7.76  | 6.10 | VB 060 |
| -    | 600 | 3.00 | 15.20 | 13.18 | 6.93  | 7.76  | 6.89 | VB 060 |
| -    | 600 | .750 | 9.77  | 9.25  | 6.34  | 7.36  | 2.99 | VB 030 |
| -    | 600 | .375 | 9.77  | 9.09  | 6.34  | 7.36  | 2.64 | VB 030 |
| -    | 600 | 4.00 | 17.54 | 15.13 | 10.47 | 10.63 | 8.03 | VB 110 |