


355NSRL


3-way brass ball valve, FNPT, threaded standard port, with deadman spring return handle.

- Pressure rating 400 WOG-100 WSP.
- Temperature range -4°F to +366°F.
- ANSI B1.20.1 connections.
- Blow-out proof stem, chrome plated brass ball and double O-ring stem packing.
- P.T.F.E seats with O-ring backing for low operating torque.
- 100% electronically tested in the open and closed position at 80 psi.
- Not to be used for drinking water.
- Four seat design for sealing between pressurized ports. 355N SRL: deadman lever - size 1/4" to 2". 365N SRL: deadman lever - size 1/4" to 2".

Technical specifications

Drawing

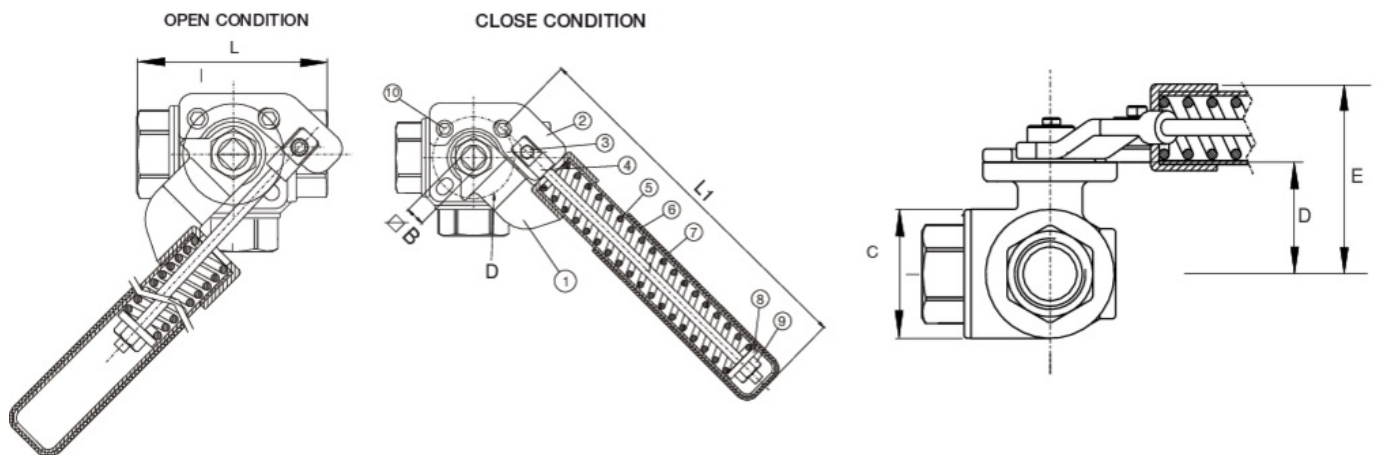

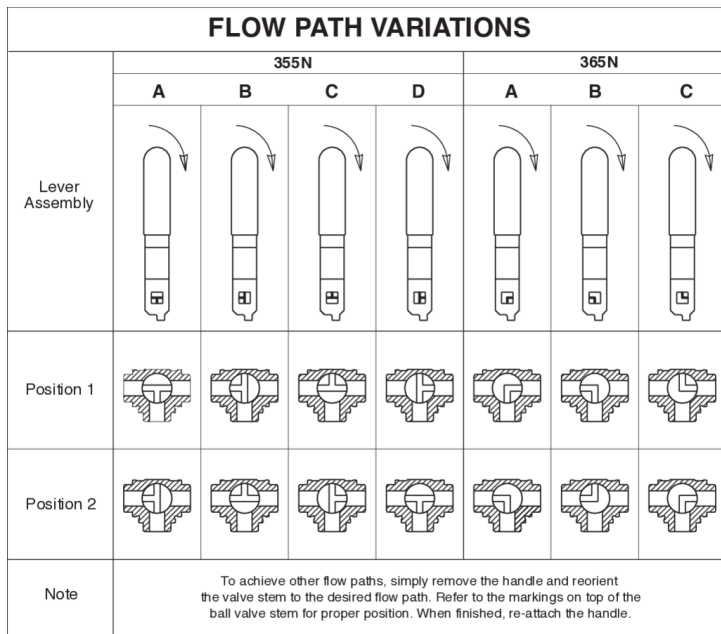

Materials

POSITION	PART NAME	MATERIAL
1	HANDLE HEAD	HANDLE HEAD
2	ANCHOR	ANCHOR
3	ANCHOR SCREW	ANCHOR SCREW
4	SPRING ROD	SPRING ROD
5	SPRING	SPRING
6	HANDLE EXTENSION	HANDLE EXTENSION
7	SLEEVE	SLEEVE
8	WASHER	WASHER
9	HEX NUT	HEX NUT
10	SOCKET HEAD SCREW	SOCKET HEAD SCREW

Table

SIZE	L1	B	D ISO 5211	HANDLE TORQUE (IN/LBS)	E	L	D	C	F	G	WEIGHT (LBS) 355N SRL
1 1/2"	8.65	0.43	F05	177	3.52	4.86	2.34	2.83	2.43	1.79	9.46
1 1/4"	8.65	0.35	F05	177	2.93	4.39	1.85	2.36	2.2	1.22	6.39
1/2"	6.7	0.35	F03	132	1.7	2.87	1.2	1.34	1.44	0.77	3.46
1/4"	6.7	0.35	F03	132	1.7	2.64	1.2	1.34	1.32	0.77	3.48
1"	8.65	0.35	F05	177	2.79	3.74	1.63	1.89	1.87	1	4.94
2"	11	0.55	F07	487	3.82	5.73	2.9	3.38	2.87	1.75	14.07
3/4"	6.7	0.35	F03	132	1.79	3.19	1.29	1.53	1.6	0.87	3.73
3/8"	6.7	0.35	F03	132	1.7	2.64	1.2	1.34	1.32	0.77	3.39

Notes

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

Certifications

Technical Standards and
Safety Authority

