


## 365NSRL


3-way brass ball valve, FNPT, threaded standard port, with deadman spring return handle.

- Pressure rating 400 WOG-100 WSP.
- Temperature range -4°F to +366°F.
- ANSI B1.20.1 connections.
- Blow-out proof stem, chrome plated brass ball and double O-ring stem packing.
- P.T.F.E seats with O-ring backing for low operating torque.
- 100% electronically tested in the open and closed position at 80 psi.
- Not to be used for drinking water.
- Four seat design for sealing between pressurized ports. 355N SRL: deadman lever - size 1/4" to 2". 365N SRL: deadman lever - size 1/4" to 2".

## Technical specifications

### Drawing

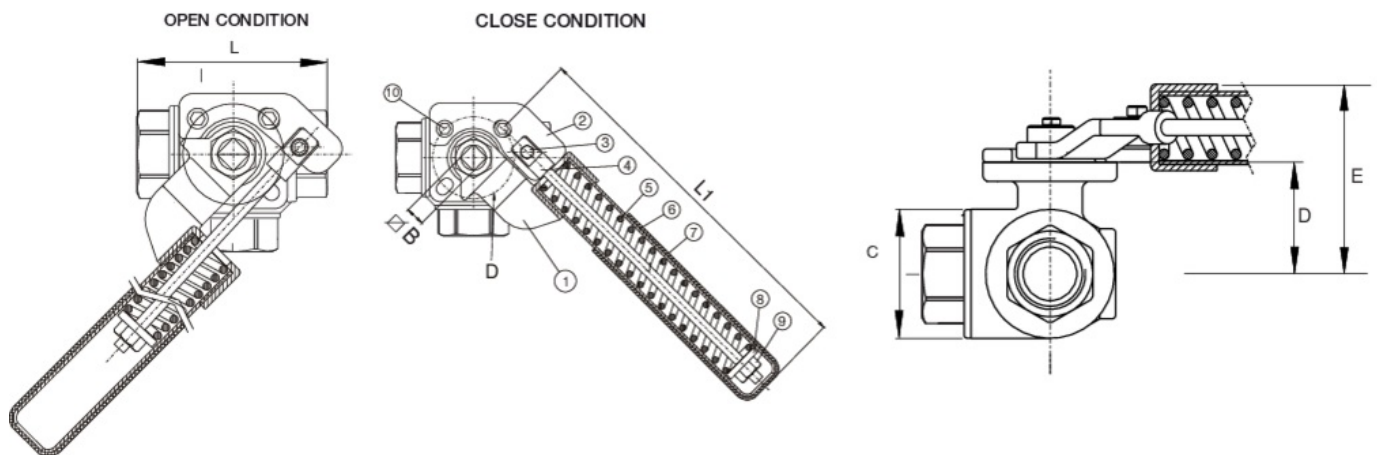

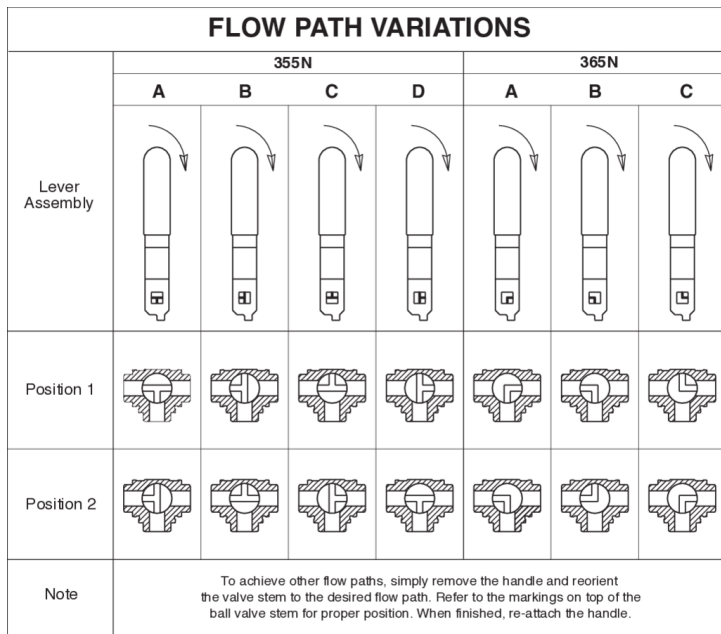

## Materials

| POSITION | PART NAME         | MATERIAL          |
|----------|-------------------|-------------------|
| 1        | HANDLE HEAD       | HANDLE HEAD       |
| 2        | ANCHOR            | ANCHOR            |
| 3        | ANCHOR SCREW      | ANCHOR SCREW      |
| 4        | SPRING ROD        | SPRING ROD        |
| 5        | SPRING            | SPRING            |
| 6        | HANDLE EXTENSION  | HANDLE EXTENSION  |
| 7        | SLEEVE            | SLEEVE            |
| 8        | WASHER            | WASHER            |
| 9        | HEX NUT           | HEX NUT           |
| 10       | SOCKET HEAD SCREW | SOCKET HEAD SCREW |

## Table

| SIZE   | L1   | B    | D ISO 5211 | HANDLE TORQUE (IN/LBS) | E    | L    | D    | C    | F    | G    | WEIGHT (LBS) 355N SRL |
|--------|------|------|------------|------------------------|------|------|------|------|------|------|-----------------------|
| 1 1/2" | 8.65 | 0.43 | F05        | 177                    | 3.52 | 4.86 | 2.34 | 2.83 | 2.43 | 1.79 | 9.46                  |
| 1 1/4" | 8.65 | 0.35 | F05        | 177                    | 2.93 | 4.39 | 1.85 | 2.36 | 2.2  | 1.22 | 6.39                  |
| 1/2"   | 6.7  | 0.35 | F03        | 132                    | 1.7  | 2.87 | 1.2  | 1.34 | 1.44 | 0.77 | 3.46                  |
| 1/4"   | 6.7  | 0.35 | F03        | 132                    | 1.7  | 2.64 | 1.2  | 1.34 | 1.32 | 0.77 | 3.48                  |
| 1"     | 8.65 | 0.35 | F05        | 177                    | 2.79 | 3.74 | 1.63 | 1.89 | 1.87 | 1    | 4.94                  |
| 2"     | 11   | 0.55 | F07        | 487                    | 3.82 | 5.73 | 2.9  | 3.38 | 2.87 | 1.75 | 14.07                 |
| 3/4"   | 6.7  | 0.35 | F03        | 132                    | 1.79 | 3.19 | 1.29 | 1.53 | 1.6  | 0.87 | 3.73                  |
| 3/8"   | 6.7  | 0.35 | F03        | 132                    | 1.7  | 2.64 | 1.2  | 1.34 | 1.32 | 0.77 | 3.39                  |

## Notes

**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).

## Certifications

Technical Standards and  
Safety Authority

