




BONOMI
NORTH AMERICA

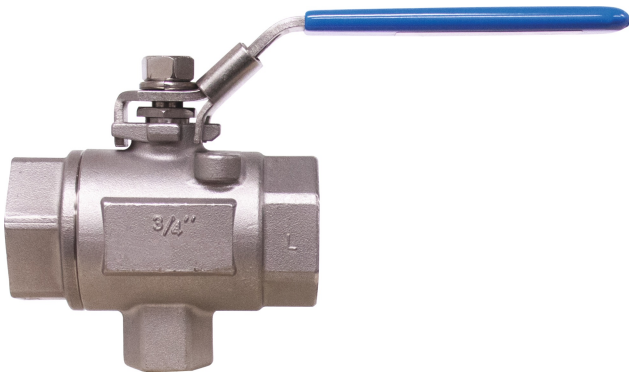

511SL

STAINLESS STEEL SAFETY EXHAUST BALL VALVE


Stainless steel safety exhaust ball valve.

- Full port, sizes 1/2" to 3/4".
- Working pressure 400 psi air service.
- Temperature range -20°F to +450°F.
- CF8M body.
- Blow-out proof stem design.
- Locking lever standard (optional oval handle).
- TFM 4215 seats.
- 100% air tested under water at 80 psi.

511SL-SSBM: 511SL with stainless steel sintered muffler.

511SOHL: 511SL with oval handle.

Technical specifications

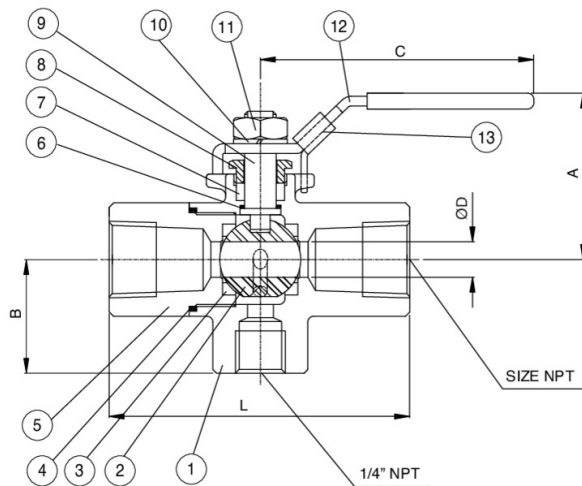

POSITION	PART NAME	MATERIAL	N.º PIECES
1	BODY	CF8M	1
2	BALL	SS 316	1
3	SEAT	TFM 4215	2
4	GASKET	GRAPHITE	1
5	END CAP	CF8M	1
6	THRUST WASHER	TFM 4215	1
7	STEM PACKING	GRAPHITE	1
8	GLAND	SS 304	1
9	STEM	SS 316	1
10	DISC WASHER	SS 301	1
11	HANDLE NUT	SS 304	1
12	HANDLE	SS 304	1
13	SLEEVE	PLASTIC	1

SIZE	A	B	C	D	E	F	L	D	WEIGHT (LBS)
1/4"	1.77	1.22	4.80	0.37	1.10	0.50	2.78	0.15	1.15
3/8"	1.77	1.22	4.80	0.37	1.10	0.50	2.78	0.15	1.15
1/2"	1.77	1.22	4.80	0.37	1.10	0.50	2.78	0.15	1.15
3/4"	1.93	1.32	4.80	0.57	1.10	0.50	2.93	0.15	1.30