



## 250N LF SRL

### DIRECT MOUNT 2-WAY BALL VALVE DEADMAN SPRING RETURN

Deadman spring lever lead free brass 2-way 2-piece, full port, FNPT threaded.


- Pressure rating 600 WOG-150 WSP.
  - Temperature range -4°F to +366°F.
  - ANSI B1.20.1 connections.
  - Blow-out proof stem, SLT. coated LF brass ball and double O-ring stem packing.
  - PTFE seats with O-ring backing for low operating torque.
  - 100% electronically tested in the open and closed position at 80 psi.
- 250N LF SRL: size 1/4" to 3".

**LEAD FREE**



COMPLIES WITH CALIFORNIA AB1953

## Technical specifications

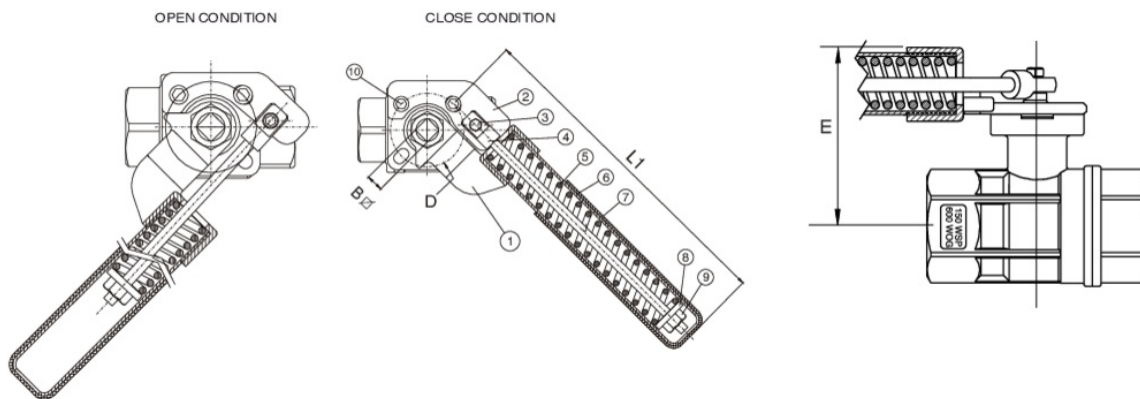

The Buna O-ring is fitted to the stem of the valve as the best possible protection against potential gas leakage under extreme duty, or low pressure applications. A secondary P.T.F.E stem seal will also assure that the valve is suitable for use up to 366°F.

POSITION	PART NAME	MATERIAL
1	HANDLE HEAD	ASTM A351-CF8M
2	ANCHOR	ASTM A351-CF8M
3	ANCHOR SCREW	AISI 316
4	SPRING ROD	AISI 316
5	SPRING	AISI 301
6	HANDLE EXTENSION	AISI 304
7	SLEEVE	VINYL
8	WASHER	AISI 304
9	HEX NUT	AISI 304
10	SOCKET HEAD SCREW	AISI 304

\* **Lead free** refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content not more than 0.25%. Source: California health & Safety code (116875). Vermont Act 193.

SIZE	L1	B	D ISO 5211	E	WEIGHT (LBS)
1/4"	6.70	0.35	F03	1.78	2.71
3/8"	6.70	0.35	F03	1.78	2.68
1/2"	6.70	0.35	F03	1.78	2.75
3/4"	6.70	0.35	F03	1.86	2.99
1"	6.70	0.35	F03	2.29	3.46
1 1/4"	6.70	0.35	F03	2.43	4.09
1 1/2"	8.65	0.43	F05	3.02	6.20
2"	8.65	0.43	F05	3.38	8.49
2 1/2"	11.00	0.55	F07	3.99	16.52
3"	11.00	0.55	F07	3.99	21.95

**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).

## Certifications



UL certified



HEALTH EFFECTS



TSSA