



GH15MM


SILENT CHECK VALVE

Stainless steel metal to metal seated silent check valve.

- Pressure rating 360 psi.
- Temperature range -65°F to +480°F.
- 0.35 psi cracking pressure.
- Can be installed in any position.
- Usable as a vacuum breaker, overpressure, and bottom valve.
- Low head loss.
- Can be used with ANSI 150 flanges.
- EPDM, NBR, FKM, or PTFE seats available upon request.

GH15MM: size 5" to 8".

Technical specifications

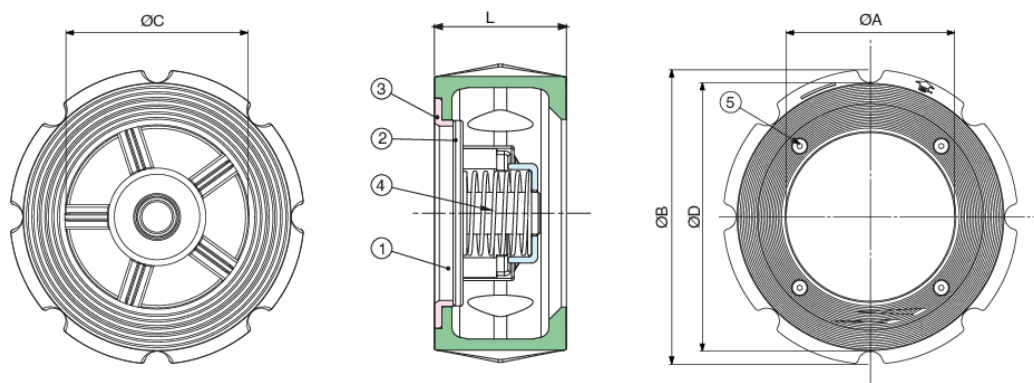

POSITION	PART NAME	MATERIAL	N.° PIECES
1	BODY	A351-CF8M	1
2	SEAT	AISI 316L	1
3	DISC	AISI 316L	1
4	SPRING	AISI 316L	1
5	SCREW	AISI 316L	1

SIZE	ØB	ØD	L	ØA	C	PSI	WEIGHT (LBS)
5"	8.27	7.56	3.54	4.72	4.92	365	18.07
6"	9.53	8.66	4.17	5.51	5.91	365	27.56
8"	10.75	-	5.51	7.20	7.87	365	42.55

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.