

511SL

STAINLESS STEEL SAFETY EXHAUST BALL VALVE


Stainless steel safety exhaust ball valve.

- Full port, sizes 1/2" to 3/4".
- Working pressure 400 psi air service.
- Temperature range -20°F to +450°F.
- CF8M body.
- Blow-out proof stem design.
- Locking lever standard (optional oval handle).
- TFM 4215 seats.
- 100% air tested under water at 80 psi.

511SL-SSBM: 511SL with stainless steel sintered muffler.

511SOHL: 511SL with oval handle.

Technical specifications

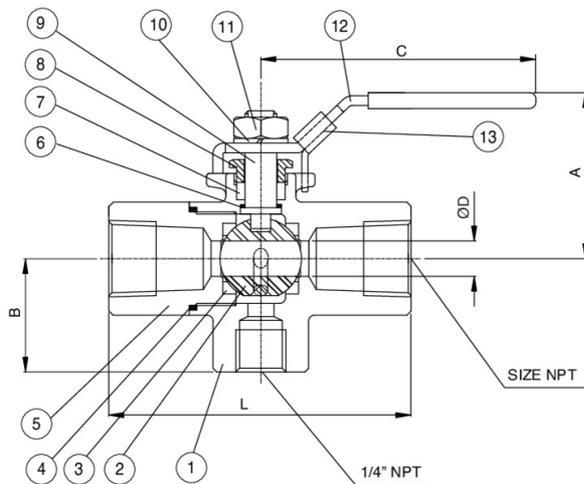

| POSITION | PART NAME | MATERIAL | N.º PIECES |
|----------|---------------|----------|------------|
| 1 | BODY | CF8M | 1 |
| 2 | BALL | SS 316 | 1 |
| 3 | SEAT | TFM 4215 | 2 |
| 4 | GASKET | GRAPHITE | 1 |
| 5 | END CAP | CF8M | 1 |
| 6 | THRUST WASHER | TFM 4215 | 1 |
| 7 | STEM PACKING | GRAPHITE | 1 |
| 8 | GLAND | SS 304 | 1 |
| 9 | STEM | SS 316 | 1 |
| 10 | DISC WASHER | SS 301 | 1 |
| 11 | HANDLE NUT | SS 304 | 1 |
| 12 | HANDLE | SS 304 | 1 |
| 13 | SLEEVE | PLASTIC | 1 |

| SIZE | A | B | C | D | E | F | L | D | WEIGHT (LBS) |
|------|------|------|------|------|------|------|------|------|--------------|
| 1/4" | 1.77 | 1.22 | 4.80 | 0.37 | 1.10 | 0.50 | 2.78 | 0.15 | 1.15 |
| 3/8" | 1.77 | 1.22 | 4.80 | 0.37 | 1.10 | 0.50 | 2.78 | 0.15 | 1.15 |
| 1/2" | 1.77 | 1.22 | 4.80 | 0.37 | 1.10 | 0.50 | 2.78 | 0.15 | 1.15 |
| 3/4" | 1.93 | 1.32 | 4.80 | 0.57 | 1.10 | 0.50 | 2.93 | 0.15 | 1.30 |