



355N LF SRL (T) - 365N LF SRL (L)

DIRECT MOUNT 3-WAY BALL VALVE DEADMAN SPRING RETURN

3-way lead free brass ball valve, FNPT threaded, standard port, with deadman spring return handle.

- Pressure rating 400 WOG-100 WSP.
- Temperature range -4°F to +366°F.
- ANSI B1.20.1 connections.
- Blow-out proof stem, SLT, coated LF brass ball and double O-ring stem packing.
- PTFE seats with O-ring backing for low operating torque.
- 100% electronically tested in the open and closed position at 80 psi.
- Four seat design for sealing between pressurized ports.

355N LF SRL: size 1/4" to 2".


365N LF SRL: size 1/4" to 2".

LEAD FREE



COMPLIES WITH CALIFORNIA AB1953

Technical specifications

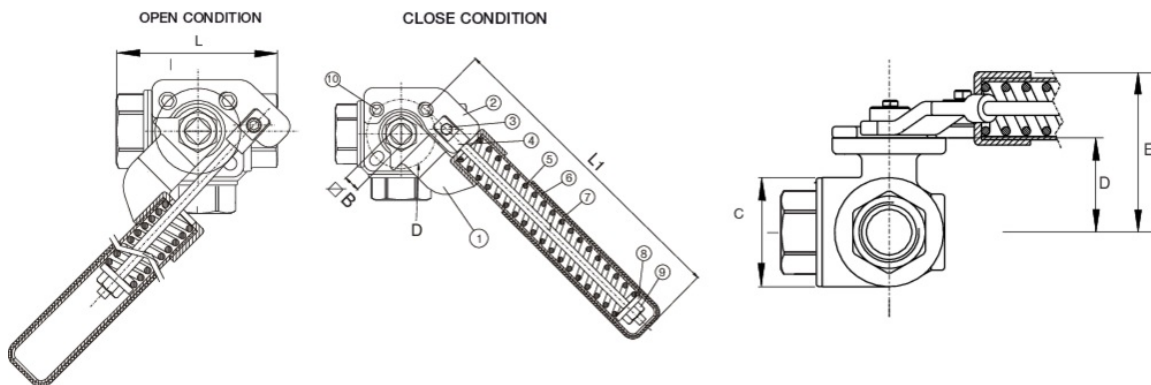

POSITION	PART NAME	MATERIAL
1	HANDLE HEAD	ASTM A351-CF8M
2	ANCHOR	ASTM A351-CF8M
3	ANCHOR SCREW	AISI 316
4	SPRING ROD	AISI 316
5	SPRING	AISI 301
6	HANDLE EXTENSION	AISI 304
7	SLEEVE	VINYL
8	WASHER	AISI 304
9	HEX NUT	AISI 304
10	SOCKET HEAD SCREW	AISI 304

* **Lead free** refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content not more than 0.25%. Source: California health & Safety code (116875). Vermont Act 193.

SIZE	L	B	D ISO 5211	HANDLE TORQUE (IN-LBS)	E	D	C	WEIGHT (LBS) 355N LF SRL	WEIGHT (LBS) 365N LF SRL
1/4"	6.70	0.35	F03	1.70	1.20	1.34	1.20	3.48	3.48
3/8"	6.70	0.35	F03	1.70	1.20	1.34	1.20	3.39	3.39
1/2"	6.70	0.35	F03	1.70	1.20	1.34	1.20	3.46	3.46
3/4"	6.70	0.35	F03	1.79	1.29	1.53	1.29	3.73	3.73
1"	8.65	0.43	F05	2.79	1.63	1.89	1.63	4.94	4.94
1 1/4"	8.65	0.43	F05	2.93	1.85	2.36	1.85	6.39	6.39
1 1/2"	8.65	0.43	F05	3.52	2.34	2.83	2.34	9.46	9.46
2"	11.00	0.55	F07	3.82	2.90	3.38	2.91	14.07	14.07

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

Certifications



UL certified



HEALTH EFFECTS



TSSA